Bengaluru Lakes Snapshot, monsoon 2026

Every lake on the Greater Bengaluru custody lists, read from Sentinel-2 at Tier 1 (relative, uncalibrated), with an order of priority for restoration funding. Reading window: **monsoon (Jun-Sep) 2026** for 173 of 181 assessed lakes (each lake's own window is named in the list). Archive 28 March 2017 to 2026-08-30; observed passes only, nothing interpolated. A post-monsoon edition follows in November 2026 from the same pipeline.

Custody lakes on the KTCDA lists	Assessed at open resolution	Condition D or E	Fundable now (Fund now + Co-fund)
210	**181**	**88**	**48**
BBMP, BDA, Forest Department, BMRCL; one duplicate row removed	29 unassessed: no polygon at 10 m, or below the evidence floors	1,184 of 2,268 ha of assessed footprint	Fund now 40; Co-fund 8; Design first 55

How to read a number in this report

Each value is a seasonal median of clear satellite passes, shown as **value ± band** with **n** passes and a confidence class **H / M / L** (methodology note v0, section 16). Shares of the footprint carry a binomial standard error on the effective pixel count plus the classifier allowance (2, 5 or 10 points by validation status); index values carry the interquartile range across the season's passes. A Health Card band is only assigned where the band is wider than the error; otherwise both candidate bands are listed. Nothing below an evidence floor is shown as a value.

What this snapshot cannot say

Dissolved oxygen, BOD, COD, nutrients, coliform, metals and toxins have no optical signature; the regulator's Use Based Class (KSPCB, June 2026) is shown beside the satellite reading for 100 lakes and is never recomputed. Chlorophyll and turbidity are relative indices until a field calibration exists; no calibrated concentration appears here. The vegetation share includes floating mats and emergent reeds inside the footprint. Encroachment is read at 10 m from Dynamic World and needs a survey sketch or a sub-metre scene before any claim. Boundaries are OpenStreetMap polygons united with the observed water extent, not survey boundaries.

The first ten in the order

1. **Yelahanka Amani kere** (BBMP, 99 ha): Fund now, Condition E, KSPCB Class E, confidence medium
2. **Puttenahalli Lake** (Forest Department, 9 ha): Fund now, Condition E, KSPCB Class E, confidence medium
3. **Doddakallasandra Lake** (BBMP, 6 ha): Fund now, Condition E, KSPCB Class D, confidence medium
4. **Kalkere Lake** (BBMP, 49 ha): Fund now, Condition E, KSPCB Class E, confidence low
5. **Kanna halli lake** (BBMP, 22 ha): Fund now, Condition E, KSPCB Class E, confidence medium
6. **Hoskerehalli Lake** (BBMP, 15 ha): Fund now, Condition E, KSPCB Class E, confidence medium
7. **Rachenahalli Lake** (BBMP, 37 ha): Fund now, Condition E, KSPCB Class E, confidence low
8. **Harohalli lake** (BBMP, 20 ha): Fund now, Condition E, confidence low
9. **Sowl kere** (BBMP, 18 ha): Fund now, Condition E, confidence low
10. **J.P Park** (BBMP, 5 ha): Fund now, Condition E, KSPCB Class D, confidence low

Order: Need class (Fund now, Co-fund, Intervene early, Design first, then the rest), Condition band, the published Need index, confidence, footprint area. Lakes are ordered within the city as the funding unit; custodians are not compared.

Sentinel-2 L2A via Google Earth Engine (noncommercial), archive to 2026-08-30; built 2026-09-03; lake-state-v2, footprints-v1, ranking-v1

The city in one view

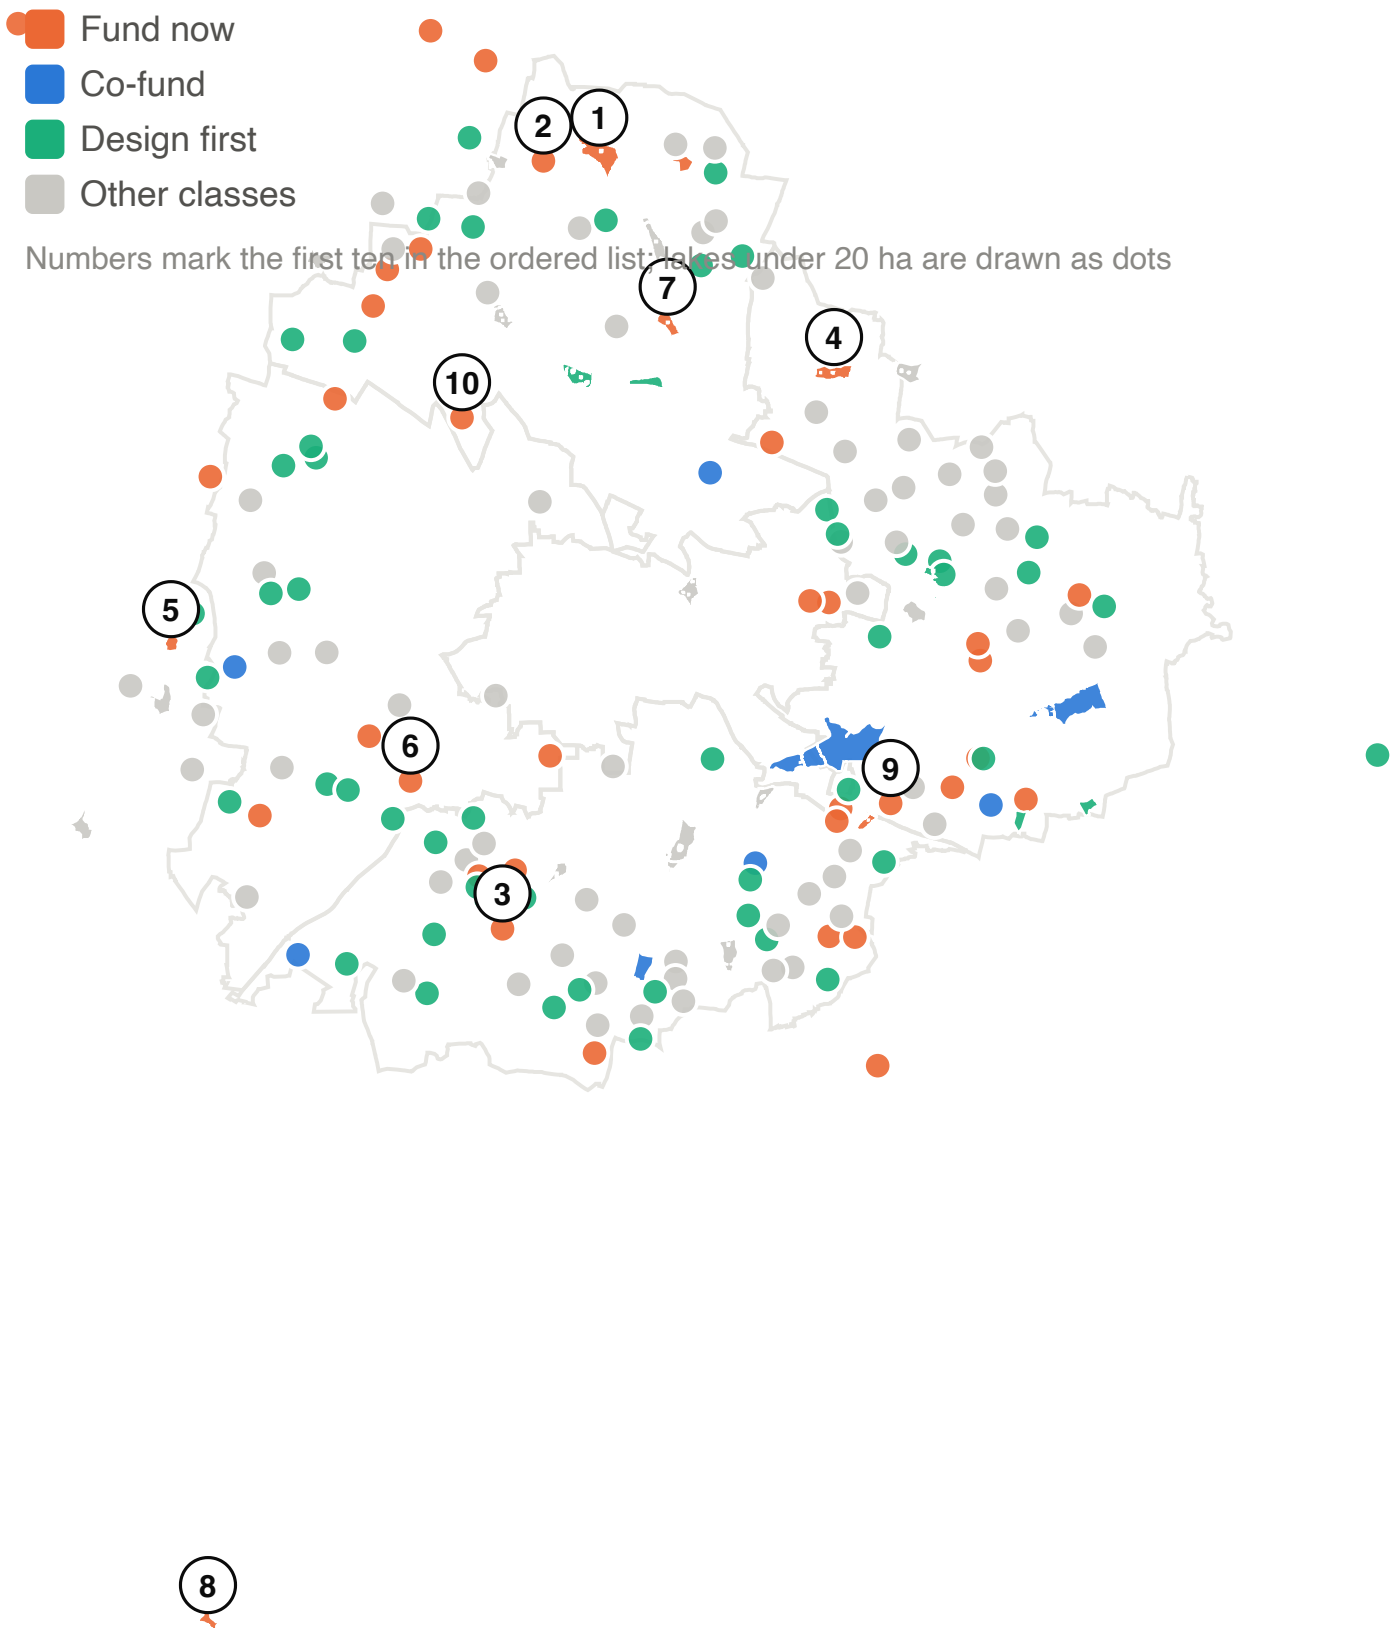

Fixed footprints of the 181 assessed lakes on the five 2025 corporation outlines, coloured by Need class. Footprint = OpenStreetMap polygon united with the Sentinel-2 observed maximum water extent (occurrence at or above 5% of clear observations, 2017 to date).

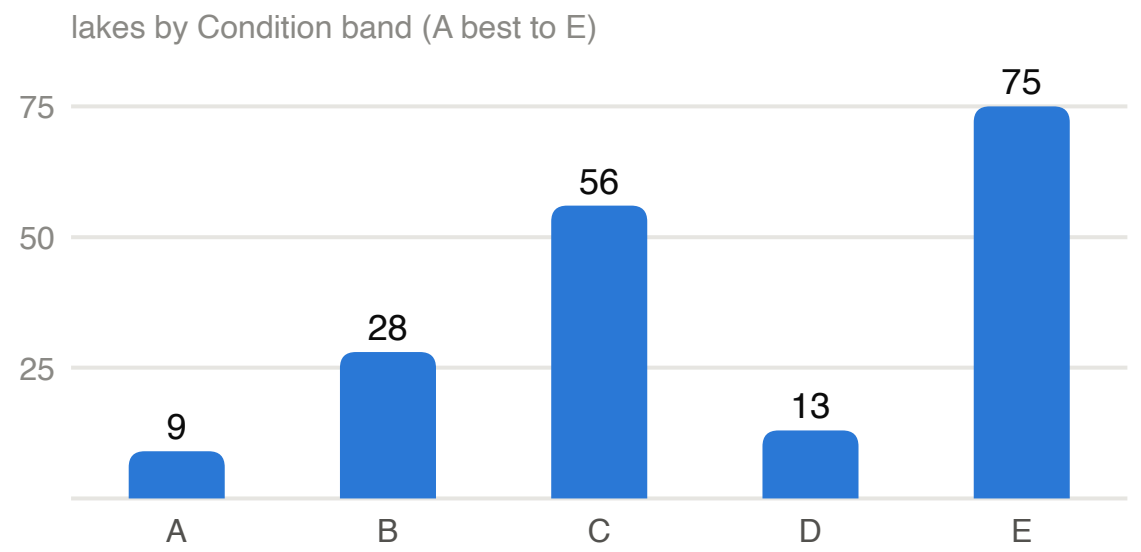

Condition band = the worse of the median and, where two or more inputs read E, the worst input; inputs are the share of the observed maximum held (C1), built share inside the footprint (C3), vegetated share (C4), the chlorophyll proxy (C5), froth events (C8) and the regulator's class (G2).

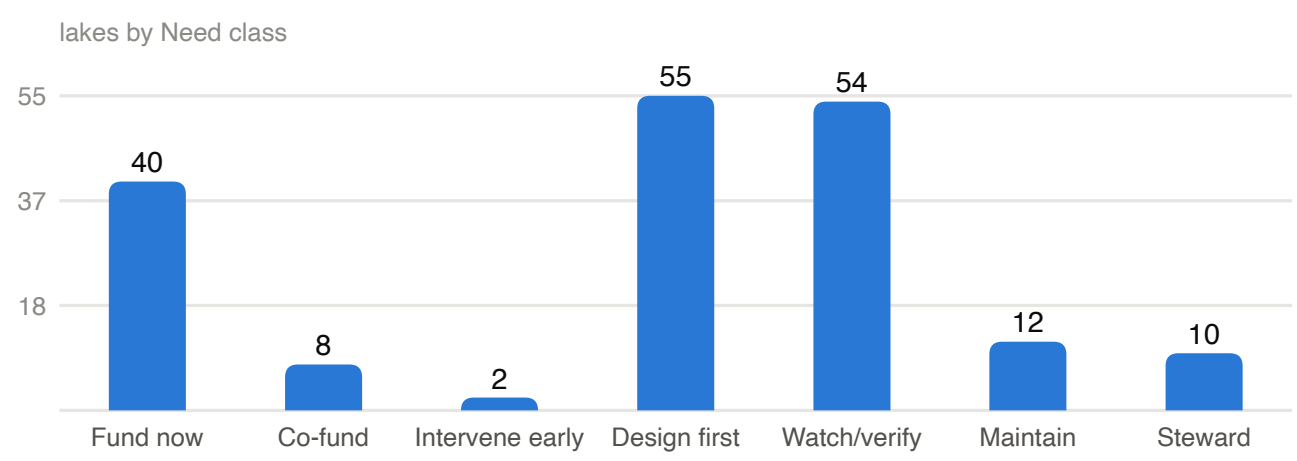

Need class by the register's rules (plan section 7.2): Condition D or E with a tractable boundary and no works on record reads Fund now (a budget line alone does not change it); with works on record, Co-fund; with a boundary or built-up question, or no water held in the window, Design first; a single severe input against an otherwise sound reading is a flag for a closer read (Watch / verify), not a verdict.

The regulator's view, June 2026: KSPCB classed 68 monitored lakes D (wildlife and fisheries) and 62 E (irrigation and industrial cooling), none A to C; 100 of those stations join a custody lake here.

Lakes with no open water observed in nine years: B. Channasandra, Chikka Begur Lake, Chikkakalasandra Lake, Mallasandra gudde Lake, Mylasandra (Sunnakallu palya) lake, Pattandur agrahara lake-124, Pattangere/Kenchenahalli lake, Sadaramangala Lake, Srinivasapura Lake, Vasanthapura Kere / Janardhana Kere. These read as dry, vegetated or built over at 10 m and are listed with Low boundary confidence.

The ordered list, fundable now first

W1 open water and W2 vegetated share are shares of the footprint in the lake's reading window (percent ± points); Q1 is the NDCI chlorophyll proxy on the open-water core (index units ± half the interquartile range). n = clear passes with a value. H / M / L = confidence class. Rows shaded orange are Fund now and Co-fund. Condition inputs: C1 storage, C3 built, C4 vegetated, C5 chlorophyll proxy, C8 froth, G2 regulator; a band followed by candidates in brackets, such as D(C/D), means the error band straddles a boundary and the value's band is shown with both candidates.

#	Lake	Need class	Condition (inputs)	W1 open water	W2 vegetated	Q1 NDCI	KSPCB	Programme on record	Conf.
1	**Yelahanka Amani kere** BBMP · North · 98.6 ha	Fund now	**E** C1=A C3=A(A/B) C4=A C5=E(D/E) C8=A G2=E	95 ±5 n18 M	4 ±5 n18 M	0.42 ±0.07 n18 M	E		M
2	**Puttenahalli Lake** Forest Department · North · 8.7 ha	Fund now	**E** C1=E C3=A(A/B) C4=E C8=A G2=E	0 ±5 n5 M	100 ±5 n5 M	insufficient	E		M
3	**Doddakallasandra Lake** BBMP · South · 5.8 ha	Fund now	**E** C1=E C3=B(A/B) C4=E C8=B G2=D	0 ±5 n18 M	99 ±6 n18 M	insufficient	D		M
4	**Kalkere Lake** BBMP · East · 49.2 ha	Fund now	**E** C1=E C3=A(A/B) C4=E C5=D(B/D) C8=A G2=E	6 ±6 n7 M	89 ±6 n7 M	0.23 ±0.14 n7 L	E	proposed	L
5	**Kanna halli lake** BBMP · outside the 2025 ward layer · 22.5 ha	Fund now	**E** C1=E C3=A(A/B) C4=E C8=A G2=E	0 ±5 n5 M	93 ±6 n5 M	insufficient	E		M
6	**Hoskerehalli Lake** BBMP · West · 15.0 ha	Fund now	**E** C1=E(B/E) C3=B(B/C) C4=E C8=A G2=E	2 ±6 n5 M	91 ±7 n5 M	insufficient	E		M
7	**Rachenahalli Lake** BBMP · North · 37.1 ha	Fund now	**E** C1=A(A/B) C3=A(A/B) C4=B(A/B/C) C5=E(D/E) C8=A G2=E	85 ±6 n6 M	14 ±6 n6 M	0.44 ±0.11 n6 L	E		L
8	**Harohalli lake** BBMP · outside the 2025 ward layer · 20.3 ha	Fund now	**E** C1=E C3=B(A/B) C4=E C5=D(D/E) C8=A	3 ±6 n17 M	90 ±6 n17 M	0.32 ±0.11 n13 L			L
9	**Sowl kere** BBMP · East · 18.2 ha	Fund now	**E** C1=E C3=A(A/B) C4=E C5=C(B/C/D) C8=A	13 ±7 n7 M	73 ±7 n7 M	0.20 ±0.16 n7 L			L
10	**J.P Park** BBMP · North · 4.6 ha	Fund now	**E** C1=E C3=A(A/B) C4=E C8=D G2=D	2 ±7 n6 L	84 ±10 n6 M	insufficient	D		L
11	**Parappana Agrahara** BBMP · South · 4.6 ha	Fund now	**E** C1=E C3=A(A/B) C4=E C8=A G2=D	0 ±5 n4 L	100 ±5 n4 M	insufficient	D		L
12	**Kengeri Lake** BBMP · West · 9.8 ha	Fund now	**E** C1=A(A/C) C3=A(A/B) C4=E(D/E) C5=C(B/C) C8=A G2=E	25 ±8 n7 M	44 ±8 n7 M	0.12 ±0.03 n6 L	E	proposed	L
13	**Gangondanahalli Lake** BBMP · outside the 2025 ward layer · 15.6 ha	Fund now	**E** C1=E C3=A(A/B) C4=E C8=A G2=E	0 ±5 n5 M	99 ±6 n5 M	insufficient	E		M
14	**Gunjur Palya kere** BBMP · East · 12.8 ha	Fund now	**E** C1=E C3=A(A/B) C4=E C8=B	0 ±5 n6 M	89 ±7 n6 M	insufficient		proposed	M
15	**Dasarahalli (Chokkasandra) Lake** BBMP · West · 6.0 ha	Fund now	**E** C1=E C3=C(C/D) C4=C(B/C/D) C8=B G2=E	15 ±8 n6 M	28 ±9 n6 M	insufficient	E		M
16	**H Gollahalli kere** BBMP · outside the 2025 ward layer ·	Fund now	**E** C1=E C3=A(A/B)	7 ±7 n19 M	65 ±8 n19 M	0.03 ±0.02 n12 L			L

#	Lake	Need class	Condition (inputs)	W1 open water	W2 vegetated	Q1 NDCI	KSPCB	Programme on record	Conf.
17	**Abbigere Lake** BBMP · North · 9.5 ha	Fund now	**E** C1=E C3=A(A/B) C4=E C5=C(C/D) C8=A G2=D	11 ±7 n6 M	76 ±8 n6 M	0.19 ±0.05 n5 L	D	proposed	L
18	**Munnekolalu kere** BBMP · East · 7.5 ha	Fund now	**E** C1=D(D/E) C3=B(A/B) C4=D(C/D/E) C5=E(D/E) C8=E G2=E	39 ±9 n5 M	32 ±9 n5 M	0.46 ±0.13 n5 L	E	proposed	L
19	**Kammagondanahalli Lake** BBMP · North · 7.5 ha	Fund now	**E** C1=E C3=A(A/B) C4=E C5=D(D/E) C8=A G2=D	10 ±7 n6 M	78 ±8 n6 M	0.32 ±0.12 n4 L	D		L
20	**Melina Byrasandra (DRDO)** BBMP · Central · 6.6 ha	Fund now	**E** C1=E(D/E) C3=A(A/B) C4=D(C/D/E) C5=C(B/C/D) C8=E	19 ±9 n8 M	38 ±10 n8 M	0.13 ±0.13 n7 L			L
21	**Amblipura melina kere** BBMP · South · 4.9 ha	Fund now	**E** C1=E C3=C(B/C) C4=E C8=E	4 ±7 n8 L	72 ±10 n8 M	insufficient		proposed	L
22	**Bhoganahalli Lake** BBMP · East · 3.7 ha	Fund now	**E** C1=E C3=A(A/B) C4=A(A/B) C5=C(C/D) C8=B G2=E	4 ±7 n8 L	8 ±8 n8 M	0.19 ±0.08 n5 L	E		L
23	**Chinnappanahalli** BBMP · East · 3.6 ha	Fund now	**E** C1=C(C/D) C3=A(A/B) C4=D(C/D/E) C5=E(D/E) C8=E G2=E	49 ±12 n5 L	31 ±11 n5 M	0.48 ±0.13 n5 L	E		L
24	**Singapura Lake** BBMP · North · 3.1 ha	Fund now	**E** C1=E C3=A(A/B) C4=C(B/C/D) C8=B G2=E	6 ±8 n5 L	27 ±11 n5 M	insufficient	E	proposed	L
25	**Challakere Lake** BBMP · East · 3.0 ha	Fund now	**E** C1=D(C/D/E) C3=A(A/B) C4=E C5=B(B/C) C8=B G2=E	22 ±12 n7 L	58 ±13 n7 M	0.09 ±0.04 n4 L	E		L
26	**Ambalipura Kelagina kere** BBMP · South · 2.2 ha	Fund now	**E** C1=E(D/E) C3=A(A/B) C4=E C5=D(C/D) C8=A G2=E	10 ±10 n8 L	64 ±13 n8 M	0.29 ±0.10 n5 L	E	proposed	L
27	**Annappanakere / Yelchenahalli Lake** BBMP · South · 2.1 ha	Fund now	**E** C1=E C3=A(A/B) C4=E(D/E) C5=C(B/C/D) C8=B G2=D	9 ±10 n7 L	50 ±13 n7 M	0.16 ±0.11 n5 L	D		L
28	**Basavanapura Lake** BBMP · South · 1.7 ha	Fund now	**E** C1=E C3=A(A/B) C4=E C8=B G2=D	7 ±10 n6 L	68 ±14 n6 M	insufficient	D		L
29	**Panathur lake** BBMP · East · 4.5 ha	Fund now	**E** C1=D(D/E) C3=A(A/B) C4=E(D/E) C5=D(D/E) C8=B G2=E	32 ±10 n6 L	41 ±10 n6 M	0.33 ±0.09 n6 L	E	proposed	L
30	**Veerasandra Lake** BMRCL · outside the 2025 ward layer · 4.1 ha	Fund now	**E** C1=E C3=A(A/B) C4=E C8=E	0 ±6 n9 L	58 ±12 n9 M	insufficient			L
31	**Avalahalli** BBMP · outside the 2025 ward layer · 3.9 ha	Fund now	**E** C1=E C3=B(B/C) C4=E C8=D	0 ±5 n5 L	92 ±8 n5 M	insufficient			L
32	**Pattandur agrahara -54 Lake** BBMP · East · 3.6 ha	Fund now	**E** C1=E C3=B(A/B) C4=E C8=A G2=D	0 ±6 n10 L	93 ±8 n10 M	insufficient	D		L

#	Lake	Need class	Condition (inputs)	W1 open water	W2 vegetated	Q1 NDCI	KSPCB	Programme on record	Conf.
33	**Devarakere** BBMP · South · 1.8 ha	Fund now	**E** C1=E(D/E) C3=A(A/B) C4=E(D/E) C5=D(C/D) C8=B G2=E	15 ±12 n6 L	47 ±14 n6 M	0.27 ±0.09 n5 L	E		L
34	**Haralakunte Lake (Somasandra Palya Kere)** BBMP · outside the 2025 ward layer · 1.7 ha	Fund now	**E** C1=E C3=A(A/B) C4=E C8=B	0 ±5 n4 L	99 ±7 n4 M	insufficient			L
35	**Kogilu Lake** BBMP · North · 24.3 ha	Fund now	**D** C1=D(D/E) C3=A(A/B) C4=D(D/E) C8=A G2=E	20 ±7 n4 M	40 ±7 n4 M	insufficient	E		M
36	**Kaigondanahalli Lake** BBMP · South · 31.8 ha	Fund now	**D** C1=D(C/D) C3=B(A/B) C4=B(B/C) C5=D(B/D/E) C8=E G2=D	41 ±7 n8 M	17 ±7 n8 M	0.23 ±0.18 n8 L	D		L
37	**Kelagina Byrasandra** BBMP · Central · 4.4 ha	Fund now	**D** C1=D(D/E) C3=A(A/B) C4=B(A/B/C) C5=D(C/D) C8=E	28 ±11 n7 L	18 ±10 n7 M	0.20 ±0.07 n7 L			L
38	**Nayandanahalli Lake** BBMP · West · 4.2 ha	Fund now	**D** C1=E(D/E) C3=A(A/B) C4=B(A/B/C) C8=D G2=D	25 ±10 n4 L	12 ±9 n4 M	insufficient	D		L
39	**Konappana Agrahara Lake** BBMP · South · 1.4 ha	Fund now	**D** C1=D(C/D/E) C3=A(A/B) C4=D(B/D/E) C5=D(B/D) C8=B G2=D	29 ±15 n9 L	31 ±15 n9 L	0.25 ±0.15 n6 L	D		L
40	**Yediyur Lake** BBMP · West · 4.2 ha	Fund now	**D** C1=D(C/D) C3=A(A/B) C4=D(C/D/E) C5=D(C/D/E) C8=B G2=D	41 ±10 n6 L	36 ±10 n6 M	0.31 ±0.11 n6 L	D		L
41	**Hulimavu Lake** BBMP · South · 41.2 ha	Co-fund	**E** C1=E C3=D(C/D) C4=E C5=C(B/C) C8=A G2=E	9 ±6 n6 M	76 ±6 n6 M	0.11 ±0.05 n6 M	E	works underway	M
42	**Kacharakanahalli** BBMP · North · 6.0 ha	Co-fund	**E** C1=E(C/E) C3=E C4=A C5=C(B/C) C8=B	2 ±6 n6 M	2 ±6 n6 M	0.10 ±0.08 n4 L		works underway	L
43	**Bellanduru Lake** BDA · East · 316.8 ha	Co-fund	**E** C1=E C3=A(A/B) C4=E C5=C(B/C) C8=A G2=E	6 ±2 n4 M	64 ±3 n4 M	0.12 ±0.02 n4 M	E	works underway	M
44	**Varthur Lake** BDA · East · 155.0 ha	Co-fund	**E** C1=E(D/E) C3=A(A/B) C4=E C5=C C8=A G2=D	21 ±6 n5 M	61 ±6 n5 M	0.14 ±0.02 n5 M	D	works underway	M
45	**Sompura Lake** BBMP · South · 7.3 ha	Co-fund	**E** C1=E(D/E) C3=D C4=E C5=B C8=A G2=D	8 ±7 n4 M	49 ±9 n4 M	0.08 ±0.01 n4 L	D	proposed	L
46	**Ullala lake** BBMP · West · 9.9 ha	Co-fund	**E** C1=E C3=D(C/D) C4=E C8=A G2=E	0 ±5 n6 M	96 ±6 n6 M	insufficient	E	proposed	M
47	**Gunjuru Karmelaram lake** BBMP · East · 2.1 ha	Co-fund	**E** C1=E C3=A(A/B) C4=E C8=C	0 ±5 n7 L	69 ±13 n7 M	insufficient		works underway	L

#	Lake	Need class	Condition (inputs)	W1 open water	W2 vegetated	Q1 NDCI	KSPCB	Programme on record	Conf.
48	**Mangammana Palya Kere** BBMP · South · 4.9 ha	Co-fund	**E** **C1=E C3=B(B/C) C4=A(A/B) C5=B(B/C) C8=E G2=D**	11 ±9 n6 L	6 ±8 n6 M	0.07 ±0.06 n6 L	D	proposed	L
49	**Sankey Lake** BBMP · West · 14.3 ha	Intervene early	C C1=C(C/D) C3=A(A/B) C4=B(A/B/C) C5=C(B/C) C8=B G2=D	52 ±8 n4 M	15 ±7 n4 M	0.10 ±0.03 n4 L	D		L
50	**Nagareshwara-Nagenahalli Lake** BBMP · East · 2.2 ha	Intervene early	C C1=C(C/D) C3=A(A/B) C4=A(A/B) C5=D(C/D) C8=D	49 ±13 n7 L	3 ±8 n7 M	0.22 ±0.08 n6 L			L
51	**Mahadevapura Lake-1** BBMP · East · 29.8 ha	Design first	**E** **C1=E C3=C(C/D) C4=C(B/C) C5=D(C/D/E) C8=E G2=E**	19 ±7 n7 L	21 ±7 n7 M	0.30 ±0.16 n7 L	E		L
52	**Karihobanahalli Lake (Narasappanakere) Lake** BBMP · West · 17.6 ha	Design first	**E** **C1=E C3=D(D/E) C4=E C8=A G2=D**	1 ±5 n4 M	92 ±6 n4 M	insufficient	D		M
53	**Hoodi kere** BBMP · East · 9.2 ha	Design first	**E** **C1=E C3=D(D/E) C4=E C5=C(B/C) C8=A G2=D**	1 ±6 n12 M	84 ±8 n12 M	0.11 ±0.04 n5 L	D		L
54	**Shivapura Lake** BBMP · West · 1.7 ha	Design first	**E** **C1=E C3=E C4=E(D/E) C8=B G2=D**	1 ±7 n6 L	50 ±15 n6 M	insufficient	D	proposed	L
55	**Subbarayana Lake** BBMP · South · 1.1 ha	Design first	**E** **C1=E C4=E C8=A**	0 ±5 n20 I	100 ±5 n20 L	insufficient			I
56	**Garveybhavipalya Lake** BBMP · South · 7.4 ha	Design first	**E** **C1=E(D/E) C3=D(C/D) C4=E C8=B**	0 ±5 n6 M	84 ±8 n6 M	insufficient			M
57	**Vibhuthipura kere** BBMP · East · 13.2 ha	Design first	**E** **C1=E(D/E) C3=D(C/D) C4=E C5=D(C/D) C8=C G2=E**	16 ±7 n9 L	56 ±8 n9 M	0.27 ±0.13 n9 L	E		L
58	**Ibblur Lake** BBMP · South · 6.7 ha	Design first	**E** **C1=E C3=A(A/B) C4=C(B/C/D) C5=C(C/D) C8=E G2=D**	6 ±8 n6 L	21 ±10 n6 M	0.18 ±0.07 n5 L	D		L
59	**Kodige Singasandra Lake** BBMP · South · 3.1 ha	Design first	**E** **C1=E C3=B(B/C) C4=E C8=B G2=D**	0 ±5 n7 L	85 ±10 n7 M	insufficient	D		L
60	**Halage vaderahalli Lake** BBMP · West · 2.9 ha	Design first	**E** **C1=E(D/E) C3=D C4=E C5=B C8=B**	16 ±10 n7 L	61 ±12 n7 M	0.05 ±0.03 n6 L			L
61	**Konanakunte Lake** BBMP · South · 2.0 ha	Design first	**E** **C1=E(D/E) C3=E C4=E C8=B**	2 ±7 n6 L	96 ±8 n6 M	insufficient			L
62	**Vasanthapura Kere / Janardhana Kere** BBMP · South · 1.8 ha	Design first	**E** **C3=E C4=E C8=A**	0 ±5 n4 L	98 ±8 n4 M	insufficient			L
63	**Channasandra** BBMP · Central · 1.7 ha	Design first	**E** **C1=E(B/E) C3=E C4=E C8=A**	0 ±5 n6 L	96 ±9 n6 M	insufficient			L
64	**Garudachar Palya Lake** BBMP · East · 1.7 ha	Design first	**E** **C1=D(D/E) C4=B(A/B/D) C5=B(A/B/D) C8=E G2=E**	27 ±15 n9 L	20 ±14 n9 L	0.09 ±0.11 n7 L	E		L

#	Lake	Need class	Condition (inputs)	W1 open water	W2 vegetated	Q1 NDCI	KSPCB	Programme on record	Conf.
65	**Chikkammanahalli Lake** BBMP · South · 1.4 ha	Design first	**E** C1=E C4=E C8=A	0 ±5 n7 L	100 ±5 n7 L	insufficient			L
66	**Uttarahalli Lake** BBMP · South · 4.4 ha	Design first	**E** C1=E(D/E) C3=D(D/E) C4=E C5=D(B/D) C8=B G2=E	23 ±10 n7 L	57 ±10 n7 M	0.20 ±0.10 n7 L	E		L
67	**Beretena Agrahara (Chowdeshwari Lake)** BBMP · South · 2.7 ha	Design first	**E** C1=E C3=E C4=E(D/E) C8=C	0 ±6 n10 L	52 ±12 n10 M	insufficient			L
68	**Gubbalalu Lake** BBMP · South · 2.0 ha	Design first	**E** C1=E C3=D C4=E C8=B G2=E	0 ±5 n5 L	93 ±9 n5 M	insufficient	E		L
69	**Lingadeeranahalli** BBMP · South · 1.8 ha	Design first	**E** C1=E(A/E) C3=E C4=E C8=A	0 ±5 n6 L	98 ±7 n6 M	insufficient			L
70	**Kembathahalli Lake** BBMP · South · 1.7 ha	Design first	**E** C1=E C3=E C4=E(D/E) C8=B G2=D	3 ±8 n5 L	51 ±15 n5 M	insufficient	D		L
71	**Pattangere / Kenchenahalli lake** BBMP · West · 1.6 ha	Design first	**E** C3=E C4=E C8=A	0 ±5 n7 L	99 ±7 n7 L	insufficient			L
72	**Chokkanahalli Lake** BBMP · North · 0.9 ha	Design first	**E** C1=E C4=D(A/D/E) C8=E	4 ±13 n8 I	35 ±26 n8 L	insufficient		proposed	I
73	**Mestripalya Lake** BBMP · South · 2.3 ha	Design first	**E** C1=E C3=E C4=E C8=A	0 ±5 n6 L	99 ±7 n6 M	insufficient			L
74	**Chikkakalasandra Lake** BBMP · South · 2.2 ha	Design first	**E** C3=E C4=E C8=A	0 ±5 n9 L	62 ±13 n9 M	insufficient			L
75	**Bheemana Katte** BBMP · West · 1.0 ha	Design first	**E** C1=E(B/E) C4=E C8=E	8 ±13 n6 I	64 ±19 n6 L	insufficient			I
76	**Vishwaneedam Lake Bangalore North** BBMP · West · 0.9 ha	Design first	**E** C1=E C4=E C8=A	0 ±5 n5 I	76 ±18 n5 L	insufficient			I
77	**Panathur lake** BBMP · East · 0.9 ha	Design first	**E** C1=E(D/E) C4=B(A/B/D) C5=C(B/C/D) C8=B G2=E	14 ±14 n6 I	19 ±15 n6 L	0.14 ±0.06 n4 I	E		I
78	**Junnasandra lake** BBMP · South · 0.8 ha	Design first	**E** C1=E C4=A C8=E	2 ±12 n9 I	0 ±5 n9 I	insufficient			I
79	**Srigandadkaval** BBMP · West · 0.6 ha	Design first	**E** C1=E C4=E C8=B	0 ±5 n6 I	96 ±12 n6 L	insufficient			I
80	**Jogi kere** BBMP · South · 0.6 ha	Design first	**E** C1=E(D/E) C4=E(D/E) C8=A	4 ±13 n4 I	62 ±23 n4 L	insufficient			I
81	**Venkateshapura Lake** BBMP · North · 0.5 ha	Design first	**E** C1=E C4=E C8=C	0 ±5 n7 I	74 ±25 n7 L	insufficient			I
82	**Kalyanikunte (Near Saibaba Temple)** BBMP · South · 0.4 ha	Design first	**E** C1=E(D/E) C4=C(A/C/E) C8=E	9 ±18 n6 I	24 ±24 n6 L	insufficient			I
83	**Shivanahalli Lake** BBMP · North · 0.4 ha	Design first	**E** C1=E C4=A C8=E	2 ±12 n7 I	0 ±5 n7 I	insufficient			I
84	**Chikka Begur Lake** BBMP · South · 9.8 ha	Design first	**D** C3=D C4=E C8=A	0 ±5 n7 L	81 ±8 n7 M	insufficient		proposed	L
85	**Pattandur agrahara lake-124** BBMP · East · 4.5 ha	Design first	**D** C3=D(C/D) C4=E C8=A	0 ±5 n8 L	92 ±8 n8 M	insufficient			L
86	**Kodigehalli lake** BBMP · outside the 2025 ward layer · 3.3 ha	Design first	**D** C1=D(C/D/E) C3=D(D/E) C4=D(C/D/E)	25 ±11 n7 L	38 ±11 n7 M	0.18 ±0.12 n5 L			L

#	Lake	Need class	Condition (inputs)	W1 open water	W2 vegetated	Q1 NDCI	KSPCB	Programme on record	Conf.
87	**Garudachar Palya (Goshala) Lake** BBMP · East · 2.7 ha	Design first	**D** **C1=D(D/E) C4=B(A/B/C) C5=D(C/D/E) C8=E G2=D**	31 ±14 n8 L	12 ±11 n8 M	0.29 ±0.14 n7 L	D		L
88	**Mangammanahalli lake** BBMP · outside the 2025 ward layer · 1.1 ha	Design first	**D** **C1=D(C/D/E) C4=E(D/E) C8=A**	18 ±15 n5 l	54 ±17 n5 L	insufficient			l
89	**Mallasandra gudde Lake** BBMP · North · 4.4 ha	Design first	**D** **C3=D(D/E) C4=E C8=A**	0 ±5 n6 L	100 ±5 n6 M	insufficient			L
90	**Bagalagunte Lake** BBMP · North · 3.0 ha	Design first	**D** **C1=D(C/D/E) C3=D(D/E) C4=E C5=C(B/C) C8=B**	23 ±11 n8 L	52 ±12 n8 M	0.12 ±0.04 n6 L			L
91	**Gunjur mouji kere** BBMP · East · 20.6 ha	Design first	C C1=E(B/E) C3=C(B/C) C4=D(C/D/E) C5=B(B/C) C8=B	0 ±5 n10 M	35 ±7 n10 M	0.09 ±0.03 n4 L		works underway	L
92	**Nelagedaranahalli Lake** BBMP · West · 5.9 ha	Design first	C C1=E C3=C(B/C) C4=C(B/C/D) C8=B	4 ±7 n6 M	23 ±9 n6 M	insufficient		proposed	M
93	**Chikka Bettahalli Lake** BBMP · North · 2.0 ha	Design first	C C1=E C3=B(A/B) C4=C(B/C/E) C8=C	0 ±6 n6 L	29 ±13 n6 M	insufficient			L
94	**Vaderahalli** BBMP · outside the 2025 ward layer · 2.4 ha	Design first	C C1=E(D/E) C3=D(C/D) C4=C(B/C/D) C5=C(C/D) C8=C	16 ±11 n6 L	23 ±11 n6 M	0.19 ±0.05 n6 L			L
95	**Swarnakunte Gudda Kere** BBMP · South · 1.6 ha	Design first	C C1=E C3=A(A/B) C4=D(C/D/E) C5=C(B/C/D) C8=B	1 ±7 n19 L	38 ±15 n19 M	0.14 ±0.07 n7 L			L
96	**Mahadevapura Lake-2** BBMP · East · 1.6 ha	Design first	C C1=E(D/E) C4=B(A/B/C) C5=C(B/C) C8=D	26 ±16 n8 l	12 ±14 n8 L	0.13 ±0.04 n7 l			l
97	**Sadaramangala Lake** BBMP · East · 0.1 ha	Design first	C C8=A G2=E	insufficient	insufficient	insufficient	E		l
98	**Mylasandra (Sunnakallu palya) lake** BBMP · West · 0.7 ha	Design first	C C4=E(A/E) C8=A	0 ±5 n5 l	62 ±54 n5 l	insufficient			l
99	**Srinivasapura Lake** BBMP · North · 0.3 ha	Design first	C C4=A(A/B) C8=E	2 ±14 n5 l	1 ±13 n5 l	insufficient			l
100	**Hebbala Lake** Forest Department · North · 46.6 ha	Design first	B C1=E C3=A(A/B) C4=B(B/C) C5=C(B/C) C8=A	2 ±5 n5 M	18 ±6 n5 M	0.13 ±0.07 n4 L		proposed	L
101	**Chikkabellandur Lake** BBMP · East · 20.1 ha	Design first	B C1=E C3=B(A/B) C4=B(A/B) C8=A	0 ±5 n8 M	12 ±7 n8 M	insufficient		proposed	M
102	**Nagavara Lake** Forest Department · North · 30.3 ha	Design first	B C1=E C3=A(A/B) C4=B(A/B/C) C5=B C8=A	13 ±6 n7 M	16 ±6 n7 M	0.07 ±0.01 n7 L		proposed	L
103	**B. Channasandra** BBMP · East · 2.9 ha	Design first	B C3=B(A/B) C4=E C8=A	0 ±5 n8 L	95 ±8 n8 M	insufficient			L
104	**Ramagondahalli** BBMP · outside the 2025 ward layer · 11.3 ha	Design first	A C1=E(D/E) C3=A(A/B) C4=A C5=B C8=A	19 ±7 n6 M	2 ±6 n6 M	0.05 ±0.02 n6 L			L
105	**Arehalli 2 & 3 (Small tanks) (Disused lake)** BBMP · outside the 2025 ward layer · 4.7 ha	Design first	A C1=E C3=A(A/B) C4=A(A/B) C8=B	0 ±5 n10 L	10 ±8 n10 M	insufficient			L

#	Lake	Need class	Condition (inputs)	W1 open water	W2 vegetated	Q1 NDCI	KSPCB	Programme on record	Conf.
106	**Kundalahalli Lake** BBMP · East · 11.4 ha	Watch / verify	C C1=C(C/D) C3=A(A/B) C4=B(B/C) C5=D(D/E) C8=E G2=D	48 ±9 n8 M	19 ±8 n8 M	0.36 ±0.07 n8 L	D		L
107	**Nalluralli tank** BBMP · East · 9.4 ha	Watch / verify	C C1=D(C/D) C3=B(A/B) C4=E C5=C(B/C/D) C8=B G2=D	37 ±8 n9 M	52 ±9 n9 M	0.14 ±0.08 n9 L	D		L
108	**Dorekere** BBMP · South · 9.1 ha	Watch / verify	C C1=C(C/D) C3=C(B/C) C4=E(D/E) C5=D(B/D/E) C8=B G2=D	45 ±9 n6 M	48 ±9 n6 M	0.23 ±0.18 n6 L	D	proposed	L
109	**Madivala Lake** Forest Department · South · 91.0 ha	Watch / verify	C C1=D(D/E) C3=A(A/B) C4=E C5=C(B/C) C8=B G2=D	29 ±6 n4 M	55 ±6 n4 M	0.10 ±0.07 n4 L	D		L
110	**Begur Lake** BBMP · South · 43.3 ha	Watch / verify	C C1=C(B/C) C3=A(A/B) C4=E(D/E) C5=D(C/D) C8=B G2=D	53 ±7 n17 M	42 ±7 n17 M	0.26 ±0.09 n17 L	D		L
111	**Bhimana kuppe** BBMP · outside the 2025 ward layer · 39.8 ha	Watch / verify	C C1=C C3=A(A/B) C4=C(B/C) C5=C(B/C) C8=A	58 ±7 n7 M	22 ±6 n7 M	0.10 ±0.04 n7 L			L
112	**Chikkabanavara lake** BDA · outside the 2025 ward layer · 33.9 ha	Watch / verify	C C1=C(C/D) C3=A(A/B) C4=D(D/E) C5=C C8=A G2=D	54 ±7 n6 M	37 ±7 n6 M	0.16 ±0.04 n6 L	D		L
113	**Allalasandra lake** BBMP · North · 16.0 ha	Watch / verify	C C1=C C3=A(A/B) C4=B(A/B/C) C5=D(B/D) C8=B G2=E	59 ±8 n6 M	17 ±7 n6 M	0.21 ±0.11 n6 L	E		L
114	**Mallathahalli lake** BBMP · West · 13.9 ha	Watch / verify	C C1=D(D/E) C3=B(A/B) C4=E C5=C(B/C) C8=B G2=D	26 ±8 n4 M	66 ±8 n4 M	0.10 ±0.04 n4 L	D		L
115	**Kudlu Anekal & Doddakere** BBMP · South · 13.2 ha	Watch / verify	C C1=B(A/B) C3=A(A/B) C4=C(B/C) C5=C(B/C/D) C8=A G2=D	70 ±8 n9 L	21 ±7 n9 M	0.20 ±0.13 n9 L	D		L
116	**Herohalli Lake Bangalore North** BBMP · West · 10.3 ha	Watch / verify	C C1=B(B/C) C3=B(A/B) C4=C(C/D) C5=D(D/E) C8=A G2=D	66 ±8 n4 M	30 ±8 n4 M	0.35 ±0.06 n4 L	D		L
117	**Haraluru kere** BBMP · South · 8.6 ha	Watch / verify	C C1=B(B/C) C3=A(A/B) C4=C(C/D) C5=C(C/D) C8=A G2=D	68 ±9 n7 M	29 ±8 n7 M	0.17 ±0.06 n6 L	D		L
118	**Doddakanahalli kere** BBMP · East · 8.0 ha	Watch / verify	C C1=C C3=A(A/B) C4=B(A/B) C5=D(C/D) C8=C G2=D	58 ±9 n7 M	10 ±7 n7 M	0.28 ±0.10 n7 L	D		L
119	**Amruthahalli Lake** BBMP · North · 7.7 ha	Watch / verify	C C1=C(C/D) C3=B(B/C) C4=D(D/E) C5=C(B/C/D) C8=B G2=E	30 ±9 n7 M	40 ±9 n7 M	0.18 ±0.09 n5 L	E		L
120	**Kempambudhi Lake** BBMP · West · 7.7 ha	Watch / verify	C C1=B(A/B/C) C3=B(A/B) C4=C(B/C/D) C5=D(D/E) C8=A G2=D	71 ±9 n6 M	27 ±9 n6 M	0.36 ±0.16 n6 L	D		L

#	Lake	Need class	Condition (inputs)	W1 open water	W2 vegetated	Q1 NDCI	KSPCB	Programme on record	Conf.
121	**Kowdenahalli lake** BBMP · East · 5.9 ha	Watch / verify	C C1=C(B/C) C3=A(A/B) C4=D(C/D/E) C5=D(C/D) C8=A G2=E	59 ±10 n7 M	32 ±9 n7 M	0.24 ±0.12 n7 L	E		L
122	**Kenchanpura lake** BBMP · outside the 2025 ward layer · 5.0 ha	Watch / verify	C C1=D(C/D/E) C3=A(A/B) C4=E(D/E) C5=C(B/C/D) C8=A	29 ±10 n6 L	41 ±10 n6 M	0.19 ±0.09 n4 L		proposed	L
123	**Horamavu Lake** BBMP · East · 5.0 ha	Watch / verify	C C1=D(C/D) C3=A(A/B) C4=B(A/B/C) C5=C(B/C) C8=C	34 ±10 n11 L	19 ±9 n11 M	0.11 ±0.08 n10 L			L
124	**Kommaghatta Lake** BDA · outside the 2025 ward layer · 11.6 ha	Watch / verify	C C1=D(C/D) C3=A(A/B) C4=D(C/D/E) C5=C(B/C/D) C8=A	43 ±8 n8 M	38 ±8 n8 M	0.13 ±0.10 n6 L			L
125	**K R Puram (BEML) / Benniganahalli Lake** BBMP · East · 8.0 ha	Watch / verify	C C1=D(C/D) C3=B(A/B) C4=B(A/B/C) C5=D(C/D) C8=C G2=E	43 ±9 n8 M	17 ±8 n8 M	0.24 ±0.11 n8 L	E		L
126	**Narasipura Lake 20** BBMP · North · 5.5 ha	Watch / verify	C C1=C(B/C/D) C3=A(A/B) C4=A(A/B) C5=C(B/C) C8=D G2=D	57 ±11 n9 L	4 ±7 n9 M	0.11 ±0.03 n9 L	D		L
127	**Kothanuru Lake** BBMP · South · 4.6 ha	Watch / verify	C C1=D(C/D) C3=A(A/B) C4=B(A/B) C5=C(B/C) C8=B G2=D	35 ±10 n6 L	11 ±8 n6 M	0.13 ±0.06 n6 L	D		L
128	**Dubasipalya lake (Valagerehalli)** BBMP · West · 4.2 ha	Watch / verify	C C1=D(C/D/E) C3=B(B/C) C4=E C5=C(B/C) C8=A	31 ±10 n7 L	54 ±11 n7 M	0.13 ±0.04 n7 L		proposed	L
129	**SitaramPalya lake** BBMP · East · 4.1 ha	Watch / verify	C C1=C(B/C/D) C3=A(A/B) C4=D(C/D/E) C5=D(D/E) C8=A G2=E	49 ±11 n9 L	38 ±10 n9 M	0.39 ±0.18 n9 L	E		L
130	**Handrahalli kere Bangalore North** BBMP · West · 3.7 ha	Watch / verify	C C1=D(C/D) C3=B(A/B) C4=C(B/C/D) C5=B(B/C) C8=A G2=E	46 ±11 n5 L	24 ±10 n5 M	0.08 ±0.04 n5 L	E		L
131	**Subedarana Kere** BBMP · South · 3.6 ha	Watch / verify	C C1=D(C/D) C3=A(A/B) C4=E(D/E) C5=C(B/C/D) C8=A	40 ±11 n6 L	47 ±11 n6 M	0.16 ±0.15 n6 L			L
132	**Puttenahalli Lake (Next to Brigade Millenium)** BBMP · South · 3.5 ha	Watch / verify	C C1=D(D/E) C3=A(A/B) C4=D(C/D/E) C5=C(B/C) C8=A G2=D	27 ±10 n10 L	36 ±11 n10 M	0.11 ±0.08 n10 L	D		L
133	**Kudlu Chikka Kere** BBMP · South · 3.3 ha	Watch / verify	C C1=B(A/B) C3=A(A/B) C4=C(B/C/D) C5=C(B/C/D) C8=B G2=D	73 ±11 n7 L	23 ±10 n7 M	0.17 ±0.08 n7 L	D		L
134	**Basapura Lake-2** BBMP · South · 2.7 ha	Watch / verify	C C1=C(B/C/D) C3=A(A/B) C4=C(B/C/D) C5=D(C/D) C8=B G2=D	49 ±12 n6 L	25 ±11 n6 M	0.22 ±0.08 n6 L	D		L

Sentinel-2 L2A via Google Earth Engine (noncommercial), archive to 2026-08-30; built 2026-09-03; lake-state-v2, footprints-v1, ranking-v1

#	Lake	Need class	Condition (inputs)	W1 open water	W2 vegetated	Q1 NDCI	KSPCB	Programme on record	Conf.
135	**Singasandra Lake South Bangalore South** BBMP · South · 2.6 ha	Watch / verify	C C1=D(C/D/E) C3=A(A/B) C4=C(B/C/E) C5=C(B/C/D) C8=E G2=D	38 ±13 n9 L	29 ±12 n9 M	0.14 ±0.09 n9 L	D		L
136	**Basapura Lake-1** BBMP · South · 2.3 ha	Watch / verify	C C1=B(A/B/C) C3=A(A/B) C4=C(B/C/E) C5=E(D/E) C8=A G2=D	70 ±12 n6 L	30 ±12 n6 M	0.45 ±0.14 n6 L	D		L
137	**Ramasandra Lake** BDA · outside the 2025 ward layer · 2.0 ha	Watch / verify	C C1=D(C/D/E) C3=A(A/B) C4=C(B/C/E) C5=D(B/D) C8=A	21 ±12 n6 L	28 ±12 n6 M	0.21 ±0.16 n4 L			L
138	**Lakshmipura Lake** BBMP · North · 1.9 ha	Watch / verify	C C1=C(B/C/D) C3=A(A/B) C4=C(B/C/D) C5=D(C/D) C8=A	32 ±14 n5 L	27 ±13 n5 M	0.28 ±0.11 n4 L			L
139	**Vijanapura Lake** BBMP · East · 1.7 ha	Watch / verify	C C1=C(A/C) C3=A(A/B) C4=D(C/D/E) C5=D(B/D/E) C8=A G2=E	56 ±14 n8 L	36 ±14 n8 M	0.25 ±0.17 n8 L	E		L
140	**Kalena Agrahara Lake** BBMP · South · 1.7 ha	Watch / verify	C C1=D(C/D) C3=A(A/B) C4=B(A/B/C) C5=C(B/C) C8=C G2=D	41 ±15 n6 L	14 ±12 n6 M	0.11 ±0.04 n6 L	D		L
141	**B. Narayanapura Lake** BBMP · East · 1.2 ha	Watch / verify	C C1=C(A/C/D) C4=E(D/E) C5=C(C/D) C8=B G2=D	40 ±17 n8 I	47 ±17 n8 L	0.20 ±0.09 n8 I	D		I
142	**Shilavanthana kere** BBMP · East · 4.6 ha	Watch / verify	C C1=C(B/C) C3=A(A/B) C4=C(B/C/D) C5=D(B/D) C8=A G2=E	59 ±10 n10 L	21 ±9 n10 M	0.21 ±0.15 n10 L	E		L
143	**Devsandra kere** BBMP · East · 4.3 ha	Watch / verify	C C1=C(C/D) C3=A(A/B) C4=B(A/B/C) C5=C(C/D) C8=B G2=E	51 ±11 n8 L	16 ±9 n8 M	0.17 ±0.07 n7 L	E		L
144	**Devarabeesanahalli Lake** BBMP · East · 4.1 ha	Watch / verify	C C1=C(C/D) C3=B(B/C) C4=D(C/D/E) C5=C(B/C) C8=C G2=E	50 ±11 n6 L	31 ±10 n6 M	0.14 ±0.05 n6 L	E		L
145	**Subramanyapura Lake** BBMP · South · 3.8 ha	Watch / verify	C C1=C(B/C) C3=A(A/B) C4=D(C/D/E) C5=D(C/D) C8=B G2=D	53 ±11 n4 L	32 ±11 n4 M	0.27 ±0.12 n4 L	D		L
146	**Hoodi Giddanakere Lake** BBMP · East · 3.4 ha	Watch / verify	C C1=D(C/D/E) C3=A(A/B) C4=C(B/C/D) C5=C(B/C/D) C8=B	29 ±11 n11 L	20 ±10 n11 M	0.15 ±0.08 n11 L		works underway	L
147	**Bhattarahalli Lake** BBMP · East · 3.4 ha	Watch / verify	C C1=C(B/C) C3=A(A/B) C4=A(A/B) C5=C(B/C/D) C8=B G2=E	52 ±11 n11 L	10 ±9 n11 M	0.12 ±0.09 n10 L	E		L

#	Lake	Need class	Condition (inputs)	W1 open water	W2 vegetated	Q1 NDCI	KSPCB	Programme on record	Conf.
148	**Byrasandra** BBMP · Central · 2.7 ha	Watch / verify	C C1=B(A/B/C) C3=A(A/B) C4=C(B/C/D) C5=D(C/D) C8=C G2=D	65 ±12 n10 L	29 ±11 n10 M	0.24 ±0.12 n10 L	D		L
149	**Varanasi Lake** BBMP · East · 2.1 ha	Watch / verify	C C1=D(D/E) C3=A(A/B) C4=A C5=B(B/C) C8=D G2=E	26 ±13 n11 L	0 ±5 n11 M	0.08 ±0.02 n7 L	E		L
150	**Nyanappanahalli Lake / Akshayanagara Lake** BBMP · South · 1.3 ha	Watch / verify	C C1=C(B/C/D) C4=D(C/D/E) C5=B(A/B/D) C8=B G2=D	40 ±16 n6 L	40 ±16 n6 L	0.10 ±0.15 n5 L	D		L
151	**Ulsoor** BBMP · Central · 40.0 ha	Watch / verify	B C1=B(A/B) C3=C(B/C) C4=B(B/C) C5=D(C/D) C8=B	77 ±6 n7 M	18 ±6 n7 M	0.28 ±0.09 n7 L		works underway	L
152	**Rampura kere** BBMP · outside the 2025 ward layer · 45.3 ha	Watch / verify	B C1=B(A/B) C3=A(A/B) C4=B(A/B/C) C5=D(C/D/E) C8=A G2=E	75 ±6 n4 M	16 ±6 n4 M	0.32 ±0.18 n4 L	E		L
153	**Sigehalli Lake** BBMP · East · 8.5 ha	Watch / verify	B C1=B(B/C) C3=A(A/B) C4=B(A/B/C) C5=C(A/C/D) C8=B G2=E	71 ±9 n9 M	14 ±8 n9 M	0.14 ±0.15 n9 L	E	proposed	L
154	**Palanahalli Lake** BBMP · North · 7.3 ha	Watch / verify	B C1=A(A/B) C3=B(A/B) C4=C(B/C/D) C5=E(D/E) C8=A	73 ±9 n20 M	26 ±9 n20 M	0.47 ±0.12 n20 L			L
155	**Chikkabasavanapura Lake** BBMP · East · 3.9 ha	Watch / verify	B C1=B(A/B) C3=A(A/B) C4=B(B/C) C5=D(D/E) C8=B G2=E	71 ±10 n9 L	20 ±10 n9 M	0.32 ±0.12 n9 L	E		L
156	**Medi agrahara** BBMP · outside the 2025 ward layer · 1.7 ha	Watch / verify	B C1=D(C/D/E) C3=E C4=A C5=B C8=B	29 ±14 n6 L	0 ±6 n6 M	0.03 ±0.01 n5 L			L
157	**Deepanjali Nagara lake** BBMP · West · 1.4 ha	Watch / verify	B C1=B(A/B/C) C3=E C4=C(A/C/D) C5=B(B/C) C8=B	51 ±15 n5 L	22 ±14 n5 L	0.07 ±0.04 n5 L		proposed	L
158	**Jakkur Lake** BBMP · North · 50.9 ha	Watch / verify	A C1=A(A/B) C3=A(A/B) C4=B(A/B/C) C5=D(D/E) C8=A G2=E	81 ±6 n5 M	14 ±6 n5 M	0.38 ±0.11 n5 L	E	proposed	L
159	**Vengaiahna kere / K.R.Puram Tank** BBMP · East · 14.3 ha	Watch / verify	A C1=A(A/B) C3=A(A/B) C4=A(A/B) C5=D(C/D) C8=B G2=E	74 ±8 n8 M	9 ±7 n8 M	0.25 ±0.14 n8 L	E	works underway	L
160	**Doddabommasandra Lake** BBMP · North · 36.2 ha	Maintain	B C1=C(B/C) C3=A(A/B) C4=B(A/B) C5=D(C/D) C8=A	64 ±7 n7 M	12 ±6 n7 M	0.26 ±0.14 n7 L			L
161	**Venkojirao Kere / Agara Kere** BBMP · South · 29.6 ha	Maintain	B C1=B(B/C) C3=A(A/B) C4=B(A/B) C5=C(C/D) C8=B G2=D	68 ±7 n7 M	13 ±6 n7 M	0.19 ±0.07 n7 L	D		L
162	**Sarakki Lake** BBMP · South · 23.7 ha	Maintain	B C1=B(A/B) C3=B(A/B) C4=A(A/B) C5=B C8=B G2=D	77 ±7 n4 M	10 ±6 n4 M	0.05 ±0.02 n4 L	D		L

#	Lake	Need class	Condition (inputs)	W1 open water	W2 vegetated	Q1 NDCI	KSPCB	Programme on record	Conf.
163	**Attur lake** BBMP · North · 23.7 ha	Maintain	B C1=B(A/B) C3=A(A/B) C4=B(A/B/C) C5=D C8=A	76 ±7 n5 M	16 ±7 n5 M	0.32 ±0.06 n5 L			L
164	**Hormavu Agara Lake** BBMP · East · 14.9 ha	Maintain	B C1=A(A/B) C3=A(A/B) C4=B(A/B) C5=D(D/E) C8=B	86 ±7 n8 M	11 ±7 n8 M	0.38 ±0.11 n8 L			L
165	**Kasavanahalli lake** BBMP · South · 13.9 ha	Maintain	B C1=D C3=A(A/B) C4=B(A/B) C5=B C8=B G2=D	37 ±8 n7 M	12 ±7 n7 M	0.06 ±0.02 n6 L	D		L
166	**Kaggadasapura** BBMP · Central · 12.2 ha	Maintain	B C1=A(A/B) C3=B(A/B) C4=B(A/B/C) C5=D(C/D) C8=B	69 ±8 n8 M	16 ±7 n8 M	0.22 ±0.11 n8 L			L
167	**Gottigere** BBMP · South · 12.0 ha	Maintain	B C1=A(A/B) C3=A(A/B) C4=B(A/B) C5=C(A/C/D) C8=B G2=D	63 ±8 n4 M	10 ±7 n4 M	0.13 ±0.16 n4 L	D	proposed	L
168	**Thirumenahalli Lake** BBMP · North · 5.7 ha	Maintain	B C1=C(B/C) C3=A(A/B) C4=B(B/C) C5=D(C/D) C8=B	54 ±10 n6 M	20 ±9 n6 M	0.24 ±0.13 n5 L			L
169	**Doddanekundi lake** BBMP · East · 38.1 ha	Maintain	A C1=A C3=A(A/B) C4=B(A/B) C5=D(D/E) C8=A G2=D	84 ±6 n8 M	12 ±6 n8 M	0.35 ±0.12 n8 M	D	proposed	M
170	**Soolikere** BBMP · outside the 2025 ward layer · 42.2 ha	Maintain	A C1=B(B/C) C3=A(A/B) C4=A(A/B) C5=C(B/C) C8=A	65 ±7 n5 M	10 ±6 n5 M	0.10 ±0.08 n4 L			L
171	**Veerasagara lake** BBMP · outside the 2025 ward layer · 6.7 ha	Maintain	A C1=D(C/D) C3=A(A/B) C4=A(A/B) C5=B(B/C) C8=A	37 ±9 n5 M	6 ±7 n5 M	0.08 ±0.04 n4 L			L
172	**Kattigenahalli Lake** BBMP · North · 5.7 ha	Steward	B C1=D(C/D) C3=A(A/B) C4=B(A/B) C8=B	43 ±10 n4 M	11 ±8 n4 M	insufficient			M
173	**Konasandra Lake** BBMP · West · 10.5 ha	Steward	B C1=B(A/B) C3=A(A/B) C4=C(B/C/D) C5=C(B/C/D) C8=A	64 ±8 n5 M	24 ±8 n5 M	0.13 ±0.12 n5 L			L
174	**Arakere Lake** BBMP · South · 7.5 ha	Steward	B C1=C(C/D) C3=A(A/B) C4=B(A/B/C) C5=B(B/C) C8=B	42 ±9 n7 M	16 ±8 n7 M	0.08 ±0.03 n7 L		proposed	L
175	**Anjanapura Lake / nagara Chunchaghatta Kere Alahalli** BBMP · South · 5.6 ha	Steward	B C1=B(B/C) C3=A(A/B) C4=B(A/B) C5=D(C/D) C8=B G2=D	62 ±10 n7 L	12 ±8 n7 M	0.21 ±0.05 n7 L	D		L
176	**Agrahara Lake** BBMP · North · 4.4 ha	Steward	B C1=C(C/D) C3=A(A/B) C4=B(A/B/C) C5=D(C/D) C8=B	48 ±10 n6 L	14 ±9 n6 M	0.25 ±0.11 n5 L			L
177	**Yelenahalli Lake** BBMP · South · 1.2 ha	Steward	B C1=B(A/B/D) C4=B(A/B/C) C5=B C8=B G2=D	52 ±17 n7 I	10 ±12 n7 L	0.06 ±0.02 n7 I	D		I
178	**Kammanahalli Lake (Meenakshi Lake)** BBMP · South · 4.9 ha	Steward	B C1=B(B/C) C3=A(A/B) C4=A(A/B) C5=C(C/D) C8=B G2=D	57 ±10 n5 L	4 ±7 n5 M	0.18 ±0.08 n5 L	D		L
179	**Gowdanapalya Lake** BBMP · South · 2.5 ha	Steward	B C1=A(A/B) C3=C(C/D)	49 ±12 n6 L	10 ±9 n6 M	0.27 ±0.12 n6 L			L

#	Lake	Need class	Condition (inputs)	W1 open water	W2 vegetated	Q1 NDCI	KSPCB	Programme on record	Conf.
180	**Talghatapura Lake** BBMP · South · 4.1 ha	Steward	A C1=A(A/B) C3=A(A/B) C4=D(C/D/E) C5=C(B/C/D) C8=A	57 ±11 n6 L	38 ±11 n6 M	0.19 ±0.10 n5 L			L
181	**Nagarabhavi Lake** BBMP · West · 0.9 ha	Steward	A C1=A(A/C) C4=A(A/B) C5=B(A/B) C8=B	56 ±19 n6 I	7 ±12 n6 L	0.03 ±0.05 n6 I			I

What continuous monitoring looks like

Three lakes with named sub-zones, monthly medians of the surface composition from 2019 (a month with fewer than two clear passes is a gap, not a value). The monsoon months are thin on every lake, which is what an honest optical record looks like.

Bellandur (BDA)

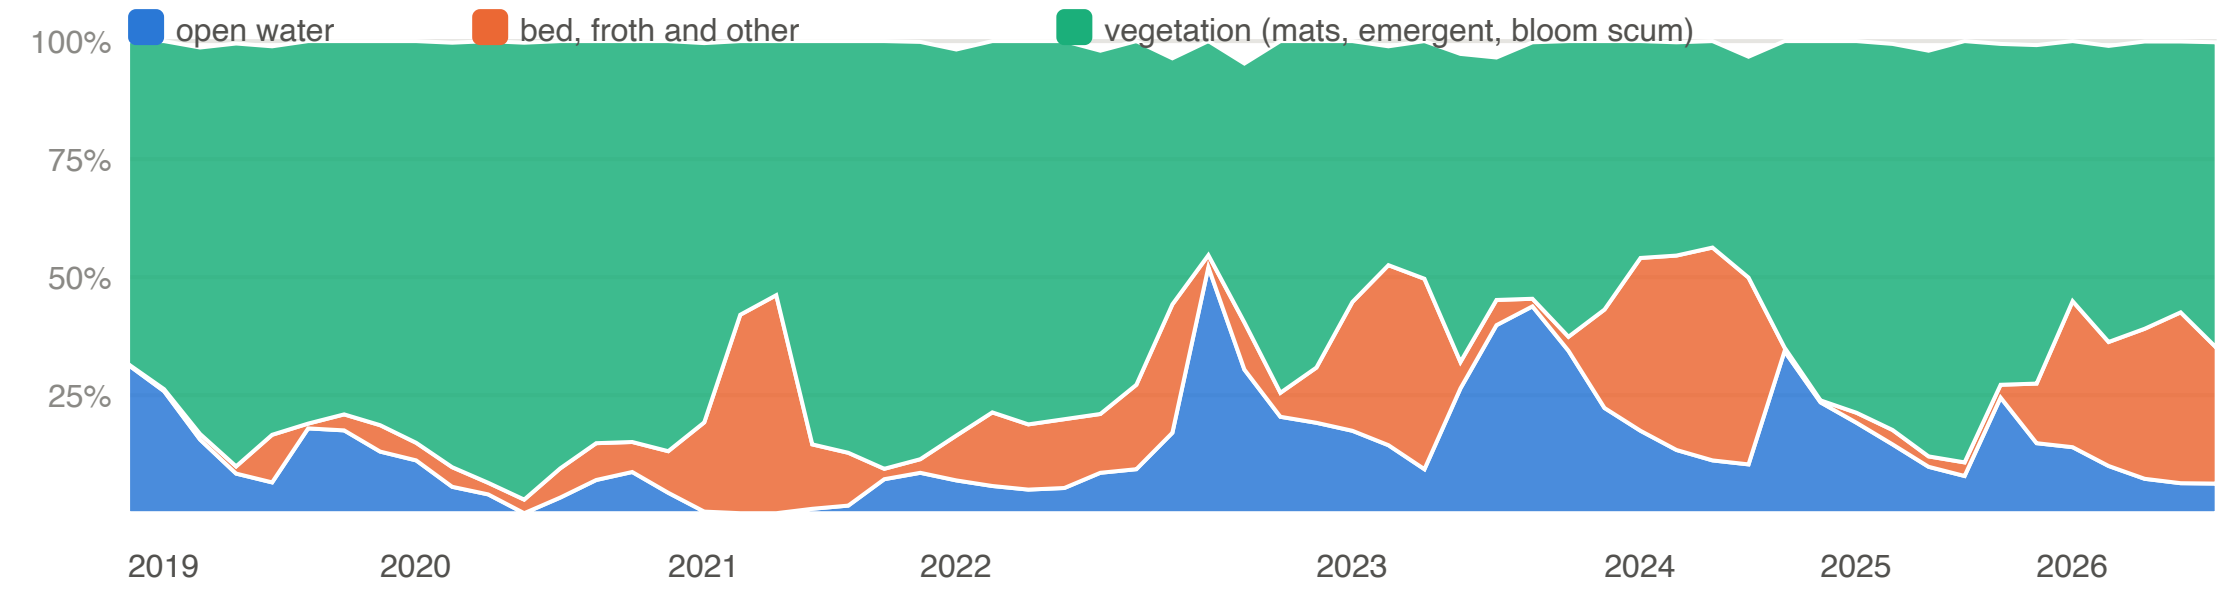

Varthur (BDA)

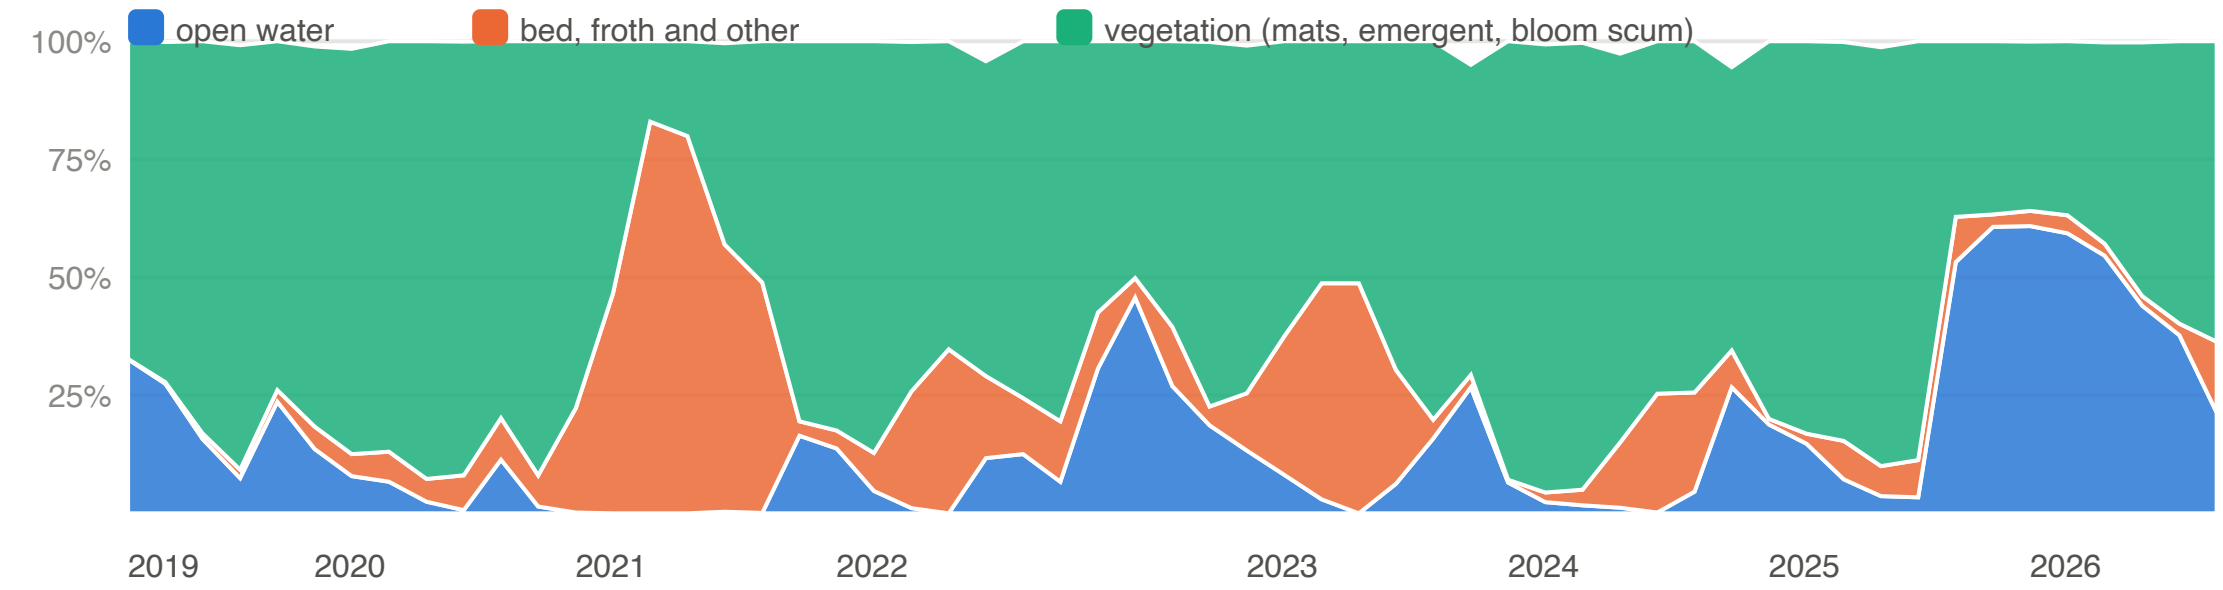

Jakkur (BBMP)

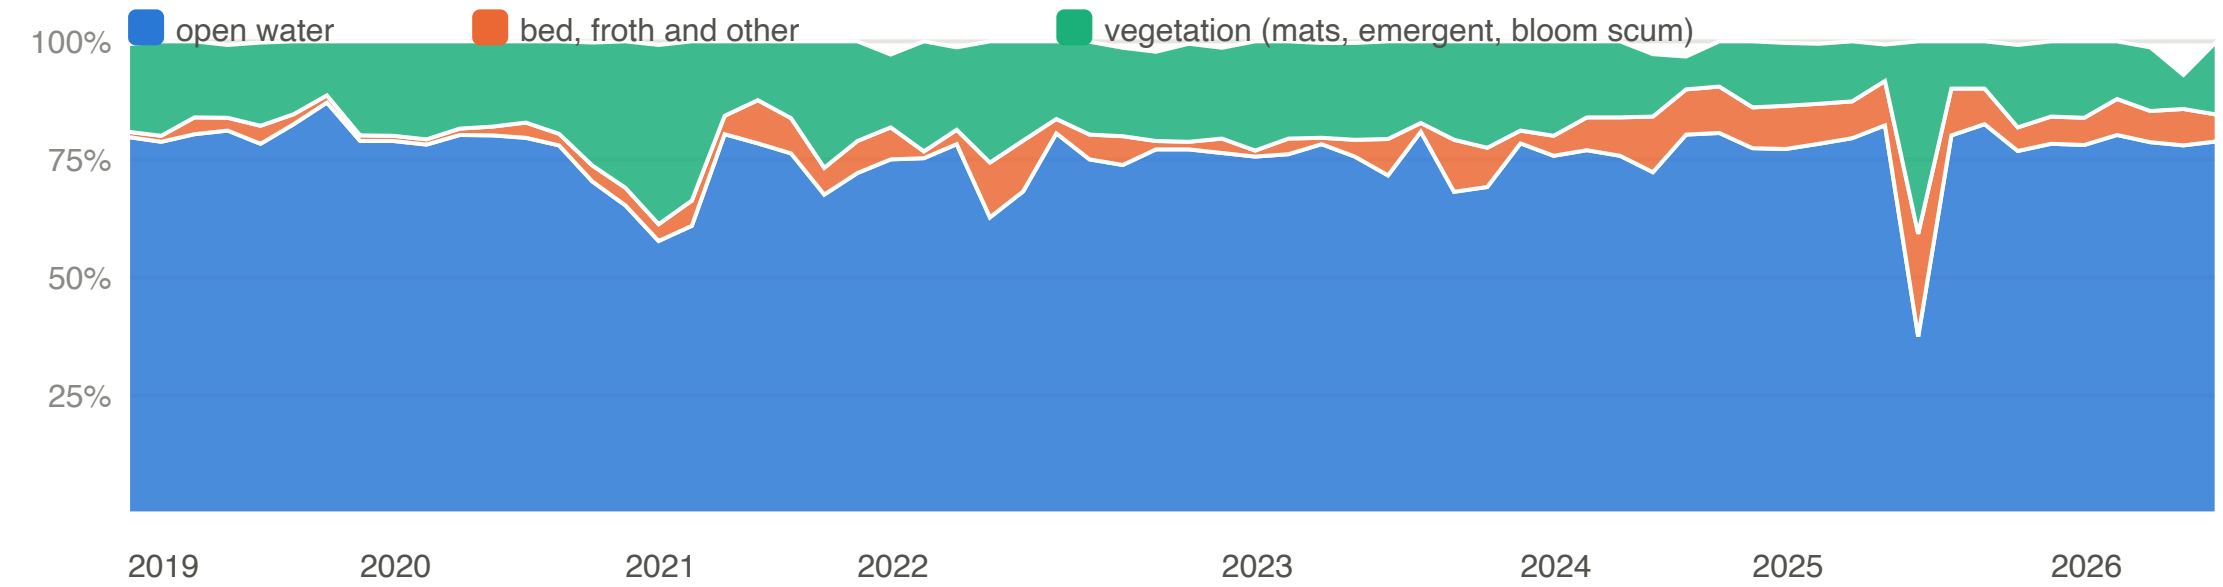

Composition classes per pass under the step 6 rule: open water (MNDWI above 0), vegetation (NDVI above 0.25 with MNDWI at or below 0: mats and emergent growth; bloom water stays open water and carries its bloom in NDCI), froth (bright, flat, NIR at or above SWIR), bed (remainder). Sentinel-2 L2A, Cloud Score+ at 0.60, 10 m grid.

Ulsoor, November 2025 to August 2026

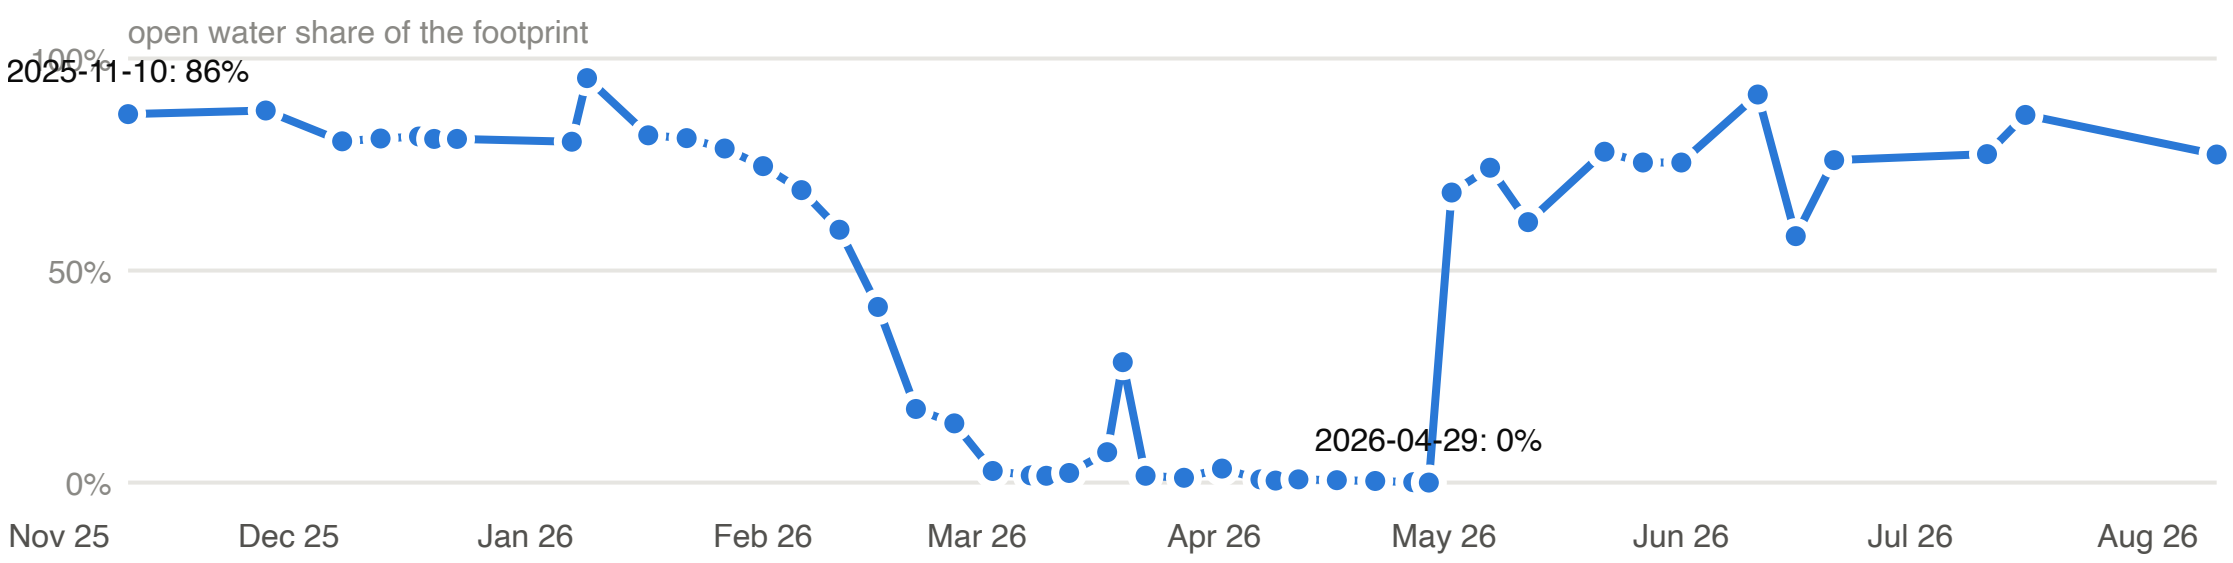

Open-water share of the footprint per clear pass. The lake is on the 2025-26 NDMF and BBMP works lists; the February 2026 drain-down reads as works in progress, and the series will show the refill.

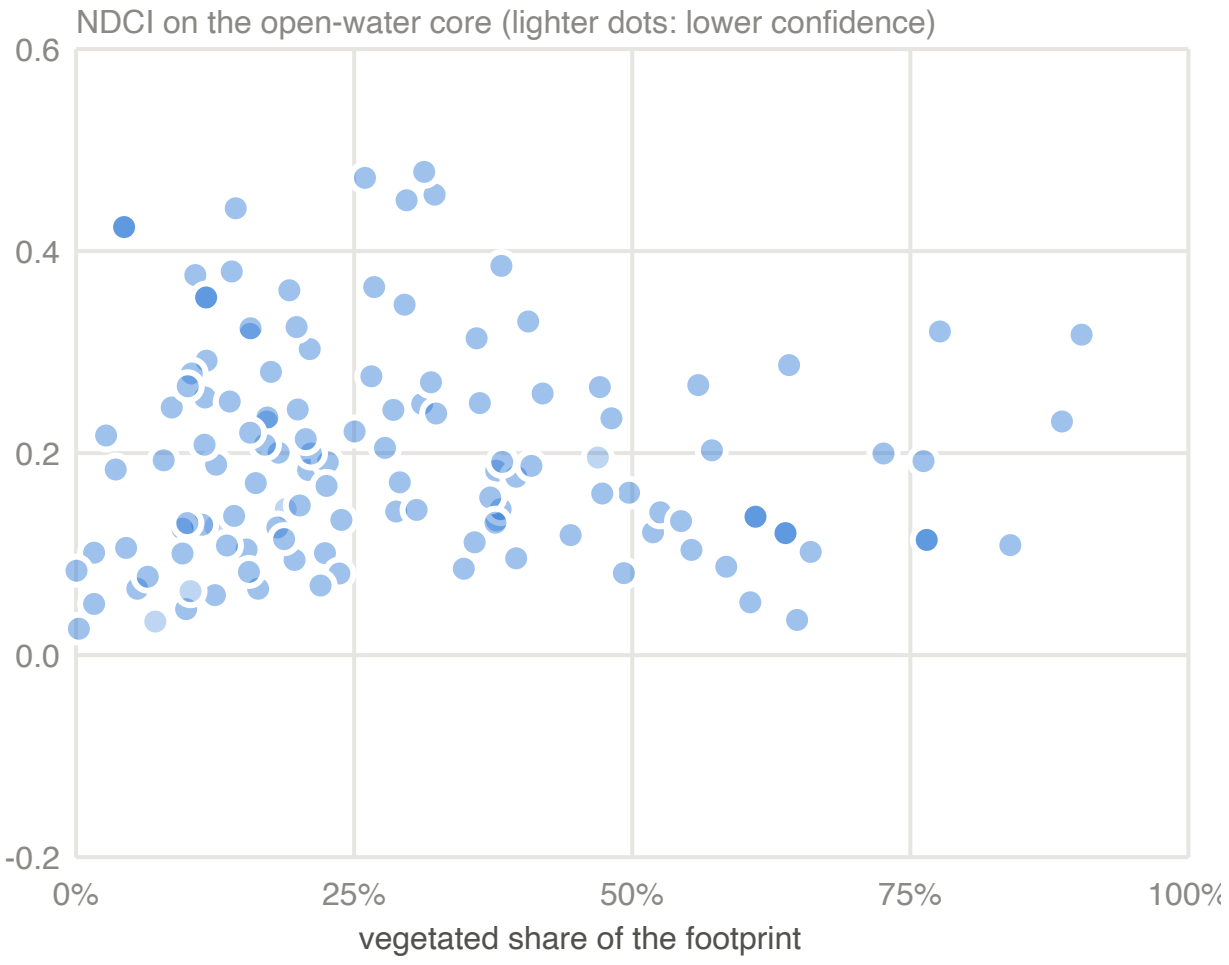

Assessed lakes with a computable chlorophyll proxy: vegetated share against NDCI on the open-water core, reading window medians. Lakes cluster in two groups, the mat-covered and the bloom-prone open lakes; both are eutrophication, with different measures.



Coverage: median clear passes per lake per month. The monsoon gap is reported, never filled; two-satellite operation began March 2017 and the L2A archive over Bengaluru is dense only from 2019.

Confidence of the assessed lakes' composition reading: insufficient 19, low 143, medium 19. Class rules: interior pixels after the shoreline ring, share of the lake within 100 m of shore, clear passes in the window, baseline observations, classifier validation on the lake's type, boundary provenance; the worst applies.

Method, in brief

Universe. The Karnataka Tank Conservation and Development Authority custody lists for Bengaluru (BBMP, BDA, Forest Department, BMRCL): 210 lakes. Each is joined to an OpenStreetMap water polygon, the BBMP Lake Management System point, the 2025 ward and corporation, and the platform's cascade layer; hand decisions are recorded in an override file.

Footprint. OSM polygon union observed-maximum component(s) after an opening of 10 m; simplified 1 m; slivers under one pixel dropped. Water occurrence: MNDWI (B3, B11) > 0.0 on clear pixels; no NDVI ceiling (lakebed, mats included); threshold 0.05. Shoreline ring 10 m, 20 m from 50 ha. Boundary confidence: Medium where the observed water corroborates the mapped polygon, Low where the assignment is unverified, no water was observed, or the observed water outside the polygon exceeds it; never High, because no survey boundary is used.

Per pass. COPERNICUS/S2_SR_HARMONIZED, cloud mask GOOGLE/CLOUD_SCORE_PLUS/V1/S2_HARMONIZED cs_cdf >= 0.6, Sen2Cor L2A as distributed (Tier 1, relative; no physical units). A pass is clear for a lake at >= 0.7 of footprint pixels clear; between 30% and 70% it contributes composition only. Floors: 20 valid pixels for a composition share, 10 open-water pixels on the core for an index, four clear passes for a seasonal value, three prior seasons and ten observations for an own-baseline percentile.

Indices. NDCI (B5, B4; Mishra and Mishra 2012), NDTI (B4, B3; Lacaux et al. 2007), B3/B4 (Toming et al. 2016), CIE hue angle (van der Woerd and Wernand 2018), all on open-water pixels of the core, all Tier 1. NDCI and MNDWI are 20 m products.

Classifier. Rule B, chosen in a validation on one lake of each type (open, vegetated, mixed, small, seasonally dry) against the platform's earlier rule: Rule A read 0 to 1% open water on eight passes and 81% on 26 Feb, flipping with the orbit: the lakebed had MNDWI 0.28 to 0.48 (water) with NDVI 0.35 to 0.46 (green bloom water), so the NDVI-first precedence classed the whole lake as mats whenever NDVI crossed 0.25. Rule B reads 73 to 83% open water on every pass with 6 to 21% ma

Bands and errors. Health Card bands (Wetland Health Card convention) for storage, built share, vegetated share and froth events; Mishra's NDCI marks, indicative on Sentinel-2, for the chlorophyll proxy. Error model and confidence rules: methodology note v0, section 16 and Appendix D (eight components; binomial sampling error on an effective pixel count of one quarter of the interior pixels; percentile-rank error from the baseline count).

Need class and order. register plan section 7.2; Condition C with Urgency Steady, Easing or Unknown and no works on record falls to Watch / verify as the residual class; a lake never seen holding water, or with C1 as its single severe input, reads Design first; any other single severe input with Condition A to C reads Watch / verify (register 7.1: one severe signal alone is a flag, not a verdict); Stakes: area >= 20 ha High, 5-20 Medium, < 5 Low; lifted one class with >= 2 custody lakes downstream or >= 5,000 buildings in the routed catchment; Tractability: High: boundary Medium and built < 10%; Medium: built 10-20% or boundary Low; Low: built >= 20%; Unknown: no water observed or built insufficient; Urgency: Rising: Q1 or W2 at or above own p90 plus rank error, or built share up >= 5 points since 2019; Easing: both at or below p10; Steady otherwise; Unknown without baseline. Rank: Need class order, Condition band (E first), Need index (Condition 0.45 x band A=0..E=4 + Urgency 0.25 x Rising=2/Steady=1/Easing=0 + Stakes 0.30 x High=2/Medium=1/Low=0), confidence, footprint area. Funding unit: Greater Bengaluru (the city); custodians are never ranked against each other.

Programme state is press-reported (Deccan Herald, 17 July 2025, on the BBMP 2025-26 budget; SANDRP, 10 February 2026) and carries the Low documentary class until a tender or order is on record.

Compute and licence. Copernicus Sentinel-2 (free and open) through Google Earth Engine on the noncommercial tier, for this snapshot only; Dynamic World (CC BY 4.0); OpenStreetMap (ODbL); KSPCB and KTCDA publications reproduced with attribution.

Unassessed at open resolution (29)

Listed after the ordered list with the queue reason, per the register rule. A hand-digitised boundary or a sub-metre scene moves a lake into the assessed set.

Lake	Queue reason
Siddapura Lake BBMP ·	no polygon at open resolution; LMS point on record
Gangashetty Lake BBMP ·	no polygon at open resolution; LMS point on record; KSPCB station 'Gangashetty Lake' at 13.00502, 77.693716 (Class E, June 2026)
Puttenahalli / Byraweshwara BBMP ·	no polygon at open resolution; LMS point on record
Lingadeeranahalli (handrahalli) North Lake Bangalore North BBMP ·	no polygon at open resolution; LMS point on record
Chikkabasthi lake BBMP ·	no polygon at open resolution; LMS point on record
Gandhinagar Hosakerehalli BBMP ·	no polygon at open resolution; LMS point on record
Varahasandra Lake BBMP ·	no polygon at open resolution; LMS point on record
Gattigerepalya (Sompura) lake BBMP ·	no polygon at open resolution; LMS point on record
Chikkagowdanapalya lake BBMP ·	no polygon at open resolution; LMS point on record
Busegowdana lake BBMP ·	no polygon at open resolution; LMS point on record

Lake	Queue reason
Narasipura Lake 26 BBMP ·	no polygon at open resolution; LMS point on record
(Nagasandra) BBMP ·	no polygon at open resolution; no location on record
19 Malagala BBMP ·	no polygon at open resolution; no location on record
Byatagunte Playa BBMP ·	no polygon at open resolution; no location on record
Lingarajapura Lake BBMP ·	no polygon at open resolution; no location on record
Geddalahalli BBMP ·	no polygon at open resolution; no location on record
Konena Agrahara BBMP ·	no polygon at open resolution; LMS point on record
(Lingannana Bilaekahalli Kere) (Disused lake) BBMP ·	no polygon at open resolution; no location on record
Dorasanni Palya (Disused lake) BBMP ·	no polygon at open resolution; no location on record
Ittmadu BBMP ·	no polygon at open resolution; no location on record
Thavarekare BBMP ·	no polygon at open resolution; no location on record
Karisandra lake BBMP ·	no polygon at open resolution; no location on record
Nandi shettappa lake BBMP ·	no polygon at open resolution; no location on record
Bovimaranahalli BBMP ·	no polygon at open resolution; no location on record
Gundopanth lake BBMP ·	no polygon at open resolution; no location on record
Kamakshipalya Lake BBMP ·	no polygon at open resolution; no location on record
Sanegoravanahalli Lake BBMP ·	no polygon at open resolution; no location on record
Agraharadasarahalli Lake BBMP ·	no polygon at open resolution; no location on record

Sources

- KTCDA, List of Lakes in Bengaluru (BBMP, BDA, Forest Department, BMRCL custody lists), obtained 3 September 2026.
- BBMP Lake Management System, lake locations (lms.bbmpgov.in), 3 September 2026.
- KSPCB, Water Quality Data of Bengaluru Lakes for the Month of June 2026 (130 stations); Classification of Water Quality under NWMP, April 2025 to February 2026.
- Copernicus Sentinel-2 Level-2A (COPERNICUS/S2_SR_HARMONIZED) and Cloud Score+ on Google Earth Engine; Dynamic World V1.
- OpenStreetMap water polygons (ODbL); Greater Bengaluru 2025 ward and corporation layers; the platform's cascade layer.
- Deccan Herald, 17 July 2025, "BBMP allocates Rs 50 crore to develop 24 lakes"; SANDRP, 10 February 2026, "Bengaluru Lakes 2025".
- Methodology: Neer Vazhvu, Satellite monitoring of Bengaluru lakes, methodology note v0 (3 September 2026); the national restoration register plan, section 7.